

New Product

EL-41S-4K


4-Way HDMI Switcher with advanced EDID management, IP, RS-232, & IR Control (4K resolution support)



The 4 by 1 HDMI Switcher enables the switching of four HDMI sources to a single HDMI output, allowing a display or AV Receiver to select between four devices. With fast switching technology the device can greatly eliminate the time required by swapping or turning ON/OFF the connected displays. It supports 4Kx2K, 3D, 36-bit Deep Color, Hi-Def. lossless audio. The management of source/sink scenarios can be operated easily through on-panel buttons, IR remote control, RS-232, Telnet and WebGUI control.

FEATURES

- HDMI (with 3D & 4K2K supported) and HDCP compliant
- Select any one of four 4K HDMI sources and display on a 4K HDTV display with fast switching between sources
- Supports 3D signals pass-through
- Supports HDTV resolutions up to 4Kx2K (3840x2160@24/25/30, 50/60 YUV-420 & 4096x2160@24, 50/60 YUV-420)
- Supports HDMI data rate from 300Mbps to 3Gbps and 'Deep Color' up to 1080p/36-bit
- Supports selection of Standard (Fixed) or TV (Downstream) EDID settings
- Supports Audio pass-through of High-definition Audio formats (LPCM 2/5.1/7.1CH, Dolby Digital 2~5.1CH, DTS 2~5.1CH, Dolby TrueHD and DTS-HD Master Audio)
- HDMI inputs support 'Standard' and 'Apple' HDCP modes. Selecting 'Apple' mode guarantees the compatibility of Apple devices with this matrix
- Supports Telnet and WebGUI control

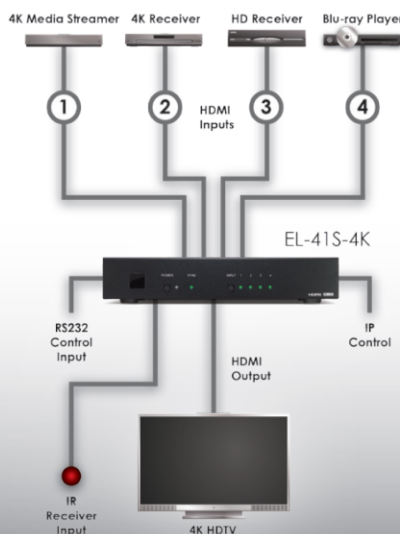

SPECIFICATIONS

Input:	4x HDMI (4x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x 9pin Dsub (1x RS-232 Data), 1x RJ45 (1x IP Control), 1x USB Type A (1x Service Port Propriety Data)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data)
Power:	5V DC/2.6A (US/EU standards, CE/FCC/UL certified)
Dimensions:	215mm (W) x 140mm (D) x 50mm (H)
Gross Weight:	1160g
Net. Weight:	400g
Packaging:	Boxed

