

## Technical Specifications

<b>Video</b>	
Video Interface	HDMI
Single Link Range	480P,720i/p, 1080i/p
Video Data Rate	4.95 Gbps
Resolution	1920 x 1200 @ 60 Hz, Resolution up to 1280 x 1024 min. 75H
Power Supply	Universal Switch mode PSU (90-240V Input) 5VDC 1A
Input Interface	19 pin HDMI female type-A
<b>IR Input/output</b>	
Signal Type	30-100 kHz modulated IR
Connector	3.5 mm mini jack, Female



Optional Infrared Device

© Copyright 2008 Smart-AVI, All Rights Reserved

### Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For the complete manual, visit [www.smartavi.com](http://www.smartavi.com).

# Smart-AVI

Smart Audio Video Integration

## User Manual

### **HDX1000** *HDMI over twisted pair*



Extend HDMI display with IR control up to 330 feet away

**Smart-AVI**  
2840 N. Naomi Ave.  
Burbank, California 91504  
Phone: (818) 565-0011  
Facsimile: (818) 565-0020

[www.smartavi.com](http://www.smartavi.com)

## Introduction

The HDX1000 Extender extends your HDMI display up to 330 feet away from your HDMI source using two CAT-6 cables. It is equipped with HDMI™ (high definition multimedia interface) connectors and is capable of supporting DVI (digital visual interface) equipment when used with a HDMI to DVI Adapter, providing greater flexibility and options when integrating several home theater components.


## Features

- Extend HDMI display with IR control up to 330 feet away.
- Top image quality at all resolutions.
- Maintains multiple high definition resolutions up to 1080p or 1920x1200 for computers.
- Distances: 330ft with a CAT6 STP cable.
- Compatible with all operating systems.
- Supports digital video/audio.
- Supports DDWG standards for HDMI compliant monitors.
- HDCP compliant.
- HDMI™ compliant.
- Uses easy to install, inexpensive twisted pair cable.
- Sends Infrared Remote over twisted pair.
- Fully compliant with standard modulated IR and the latest IRDA.
- Fully transparent path for all protocols and data transfers.

## What's in the box?

Description	Qty	Part Number
HDMI Transmitter	1	HDX-TX1000
HDMI Receiver	1	HDX-RX1000
HDMI Cable	1	CCHDMIMM06
5VDC 1A Power Supply	2	PS-5V1A-US
Optional		
IR Emmitter		SM-LED
IR Eye Receiver		SM-EYE

## Installation Diagram

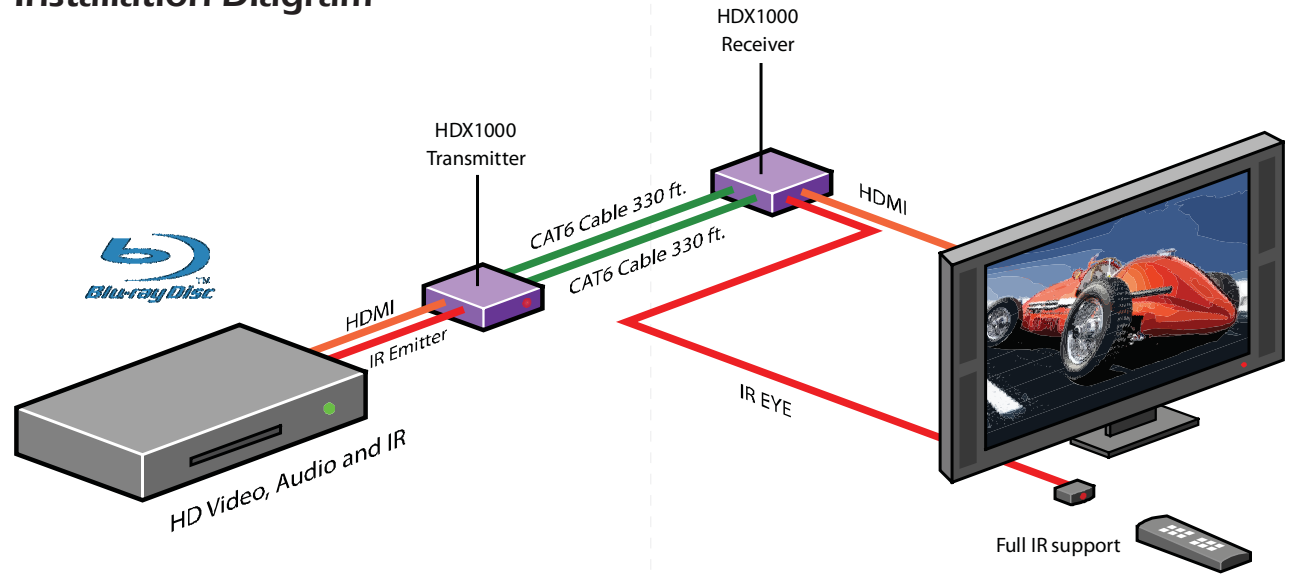

HDX1000 Transmitter Installation Diagram

HDX1000 Installation Diagram

### Connecting The Transmitter

1. Connect the output of the HDMI device to the video input of the transmitter using the included HDMI cable.
2. Connect IR cables from the display unit to the transmitter. (Optional)
3. In the back of the unit connect the 2 CAT6 cables that will connect to the receiver unit.
4. Connect the power supply.

### Connecting The Receiver

1. Connect the 2 CAT6 cables (coming from the transmitter) to the back of the receiver.
2. Connect the display to the HDMI out connector on the front of the receiver.
3. Connect the IR cables from the receiver to the display unit. (Optional)
4. Connect the power supply.

Preparing & Connecting System CAT6 Cable  
Following is the wiring standard for terminating CAT 6 cable using RJ-45 connector:

- |        |            |
|--------|------------|
| Pair 1 | Pins 1 & 2 |
| Pair 2 | Pins 3 & 6 |
| Pair 3 | Pins 4 & 5 |
| Pair 4 | Pins 7 & 8 |



Connectors:	RJ-45
Capacitance:	14 pf/ft (46.2 pf/m)
Conductor Gauge:	24 AWG
Impedance:	100 +/- 15 ohms
	4 - Pair