

New Product

AU-A300

Integrated 2 Channel Zone Amplifier



HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

The AU-A300 is a compact 2 channel amplifier that is perfect for providing high quality audio distribution into remote AV zones. This solution can integrate audio from a CYP matrix input, local inputs (I-Pod and MP3 etc) and even the TV which is growing in popularity as a dedicated source within an AV system.

FEATURES

- 30W per channel digital stereo Amplifier
- Inputs: HDMI x 2, 1 x L/R Stereo audio, 1 x Optical, 1 x Digital Co-Ax, 1 x 3.5mm Stereo
- Outputs: 1 x HDMI, 1 x Optical, 1 x Digital Co-Ax, 1 x L/R Stereo (Line Level output), Speaker Terminals
- Control via remote control, RS-232 or IP (Web GUI or Telnet)
- Dedicated Microphone input for commercial application
- Supports Digital to Analogue (DAC) and Analogue to Digital (ADC) conversion
- Simultaneous audio outputs
- Compact design for remote application

SPECIFICATIONS

Input: 2x HDMI (2x HDMI Uncompressed AV and Data), 1x XLR (1x Microphone), 1x Toslink (1x Optical - 2 Channel LPCM), 1x RCA (1x Coaxial - 2 Channel LPCM), 2x RCA (1x Analogue - Stereo (L/R)), 1x 3.5mm Stereo mini-jack (1x Analogue - Stereo(L/R)), 1x RJ45 (1x IP Control), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x 9pin Dsub (1x RS-232 Data)

Output: 1x HDMI (1x HDMI Uncompressed AV and Data), 1x Toslink (1x Optical - 2 Channel LPCM), 1x RCA (1x Coaxial - 2 Channel LPCM), 2x RCA (1x Analogue - Stereo (L/R)), 4x Speaker Binding Posts (1x Speaker Level Stereo Output)


Power: 24V/4.16A DC (US/EU standards, CE/FCC/UL certified)

Dimensions: 255mm (W) x 170mm (D) x 48mm (H)

Gross Weight: 2260g

Net. Weight: 1060g

Packaging: Retail Packaged

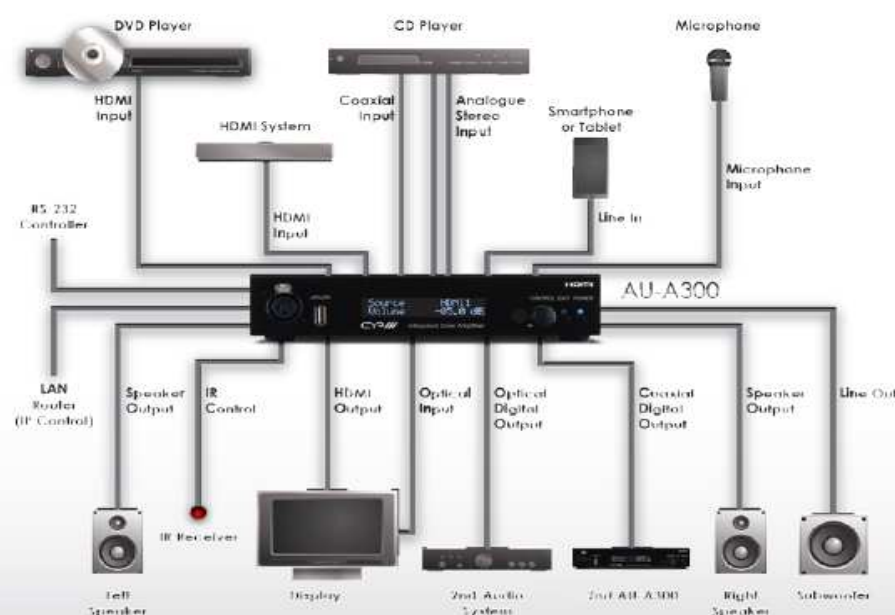

CYP

