

New Product PU-1H7HBTL

1 HDMI to 7 HDBaseT™ LITE Splitter (60m) including additional HDMI output



USE WITH PU-514L-RX/PU-514L-WPRX




The PU-1H7HBTL enables a single HDMI source input to be distributed to 7 HDBaseT™ outputs. The HDBaseT™ outputs allow uncompressed distribution of HDMI, and IR signals over a Single CAT5e/6/7 cable up to lengths of 60m. Perfect for both residential and commercial AV installations, the PU-1H7HBTL can distribute HDMI signals to 7 displays. The product also includes an additional HDMI output for increased flexibility and can also be cascaded up to 5 times to allow distribution to potentially 50 screens or more.

PU-514L-RX or PU-514L-WPRX Receivers are recommended to utilise the full functionality of the HDBaseT™ LITE outputs of this device.

FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- HDMI, HDCP, & DVI compliant
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24, 4K2K; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- Supports HDCP repeating and CEC functions
- Uncompressed data transfer over single CAT cable (60m - CAT5e/6/7)
- Audio support up to 7.1CH & Dolby TrueHD, DTS-HD
- Supports HDMI / IR
- Supports 3D signals
- Choose to power the PU-514L-RX or PU-514L-WPRX receivers via the USB output from a TV (Cable available separately - APC-USB): Please note the performance and consistency of USB power outputs from TV's can vary and cannot be guaranteed by CYP.

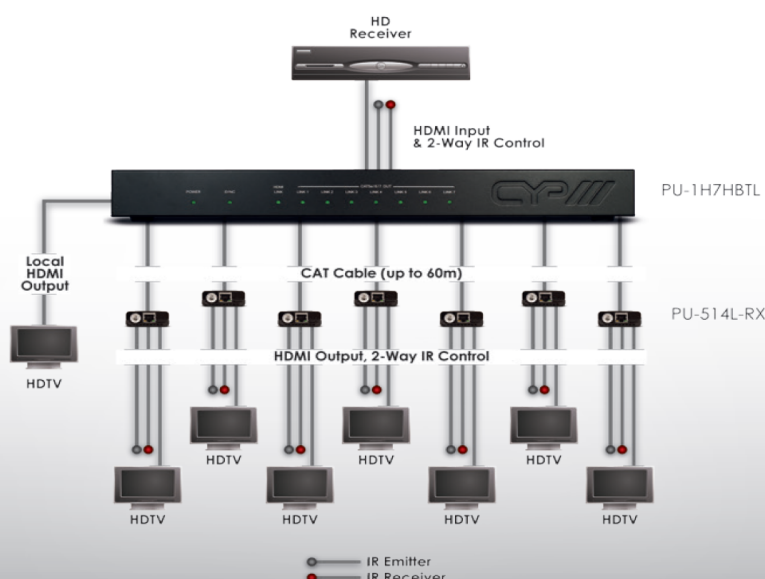

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 7x RJ45 (7x HDMI & Propriety Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	24V/2.7A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	430mm (W) x 180mm (D) x 40mm (H)
Gross Weight:	3300g
Net. Weight:	2120g
Packaging:	Boxed

