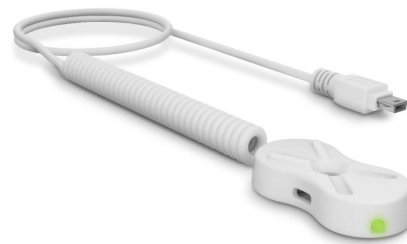# X-SNAPPER ACTIVE SECURITY & PICKUP

XS range

The nexmosphere X-Snapper is a unique product to display small merchandise, like hand-held devices out of the box. It is simple to install, use, and maintain due to the high-quality finishing and non-marking double-sided tape.

The X-Snapper X is a pick-up detector and can be used as an active security device as well. When a product is lifted, the X-Snapper X registers the movement and can trigger any event on the connected Xperience controller, such as a video, to start or an audio track to play.

Features
• Small form factor
• Pick-up detection sensor
• Active product security

X-talk

The X-Snapper can be easily connected to any of the nexmosphere Xperience controllers using the X-talk interface. All the settings of the X-Snapper are programmable by the controller, enabling a seamless integration in your application.
• Plug and smile interface
• Compatible with any nexmosphere Xperience controller
• Powered and programmable by the nexmosphere Xperience controller for ease of use

Pickup detection

The sensor registers a pick-up of the merchandise as well as when it is put back on the shelf (place-down). Both events can be used as triggers on the Xperience controller, for example, to start a video or illuminate a string of LEDs. The Xperience controller can also run statistics, showing you those products that are often picked and those that are the less preferred ones, providing you a valuable insight into shopping behavior.
• Programmable sensitivity on the Xperience controller
• Pick-up and place-down registration
• Highly responsive
• False detection eliminated (multiple sensor shake)
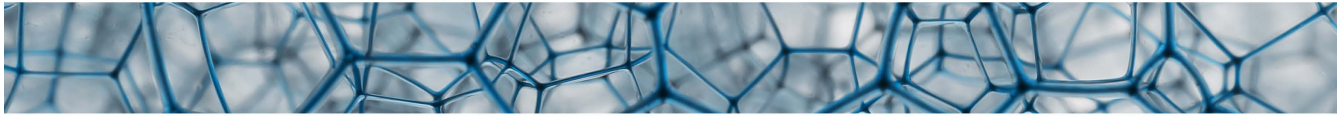
Security

The alarm gets triggered if the merchandise is removed; cables are cut or removed from the Xperience controller. The micro-optical sensor has no moving parts eliminating false alarm caused by most commonly used micro-switches.
• No mechanical moving parts that can break by intense use
• Easy to setup and maintain (plug and secure)
• Status LED clearly indicates alarm status (programmable/ dimmable on Xperience controller)

Benefits
• 4 strong neodymium magnets ensure that the product always returns to its original position
• Securely mounts on any flat surface, horizontal, vertical, or angled
• Light and flexible cable allows customers to experience the real weight and feel of the merchandise
• Easily removable non-marking double-sided tape
• Multiple data gathering functionalities on the Xperience controller offer an unique insight into how your application is being used
• Auto-calibration and autostart for highly reliable applications (24/7)

syscomtec Distribution AG Raiffeisenallee 8 · 82041 Oberhaching · Tel. +49-89 666 109 330 · Fax +49-89-666 109 339 · post@syscomtec.com · www.syscomtec.com

X-SNAPPER ACTIVE SECURITY & PICKUP

Thermal specifications

Operating temperature: +10'C…+40'C/ +50'F … +104'F
Storage temperature: -20'C…+50'C/ -4'F … +122'F

Electrical specifications

Operating voltage: 5V DC (via X-talk interface)
Power consumption: 100mA

Standards and Certifications

Compliant with IEC 60950-1(ed.2);am1;am2
CE certificate
US/CAN certification in progress
RoHS compliant

Miscellaneous

• 3 cable lengths available (60/120/180 cm)
• Custom colors and cable length available on request
• 1 year warranty (optional 3-year extended warranty
  available)

Packaging

Items per carton   1, 10 or 50 pcs

Mechanical dimensions

LxWxH: 46 x 23 x 10,3 mm
Screw fixation: Double sides adhesive tape

Ordering information

Product ID	Description	Netto weight	Quantity
XSW-X34	X-Snapper Pick-up & Security, White, 60cm	30g	1 pc
XSW-X35	X-Snapper Pick-up & Security, White, 120cm	36g	1 pc
XSW-X36	X-Snapper Pick-up & Security, White, 180cm	42g	1 pc
XSW-X24	X-snapper Security only, White, 60cm	30g	1 pc
XSW-X25	X-snapper Security only, White, 120cm	36g	1 pc
XSW-X26	X-snapper Security only, White, 180cm	42g	1 pc
XSW-X14	X-Snapper Pick-up only, White, 60cm	30g	1 pc
XSW-X15	X-Snapper Pick-up only, White, 120cm	36g	1 pc
XSW-X16	X-Snapper Pick-up only, White, 180cm	42g	1 pc

syscomtec Distribution AG Raiffeisenallee 8 · 82041 Oberhaching · Tel. +49-89 666 109 330 · Fax +49-89-666 109 339 · post@syscomtec.com · www.syscomtec.com