




Webinterface on premises-Management Server-POV Clients



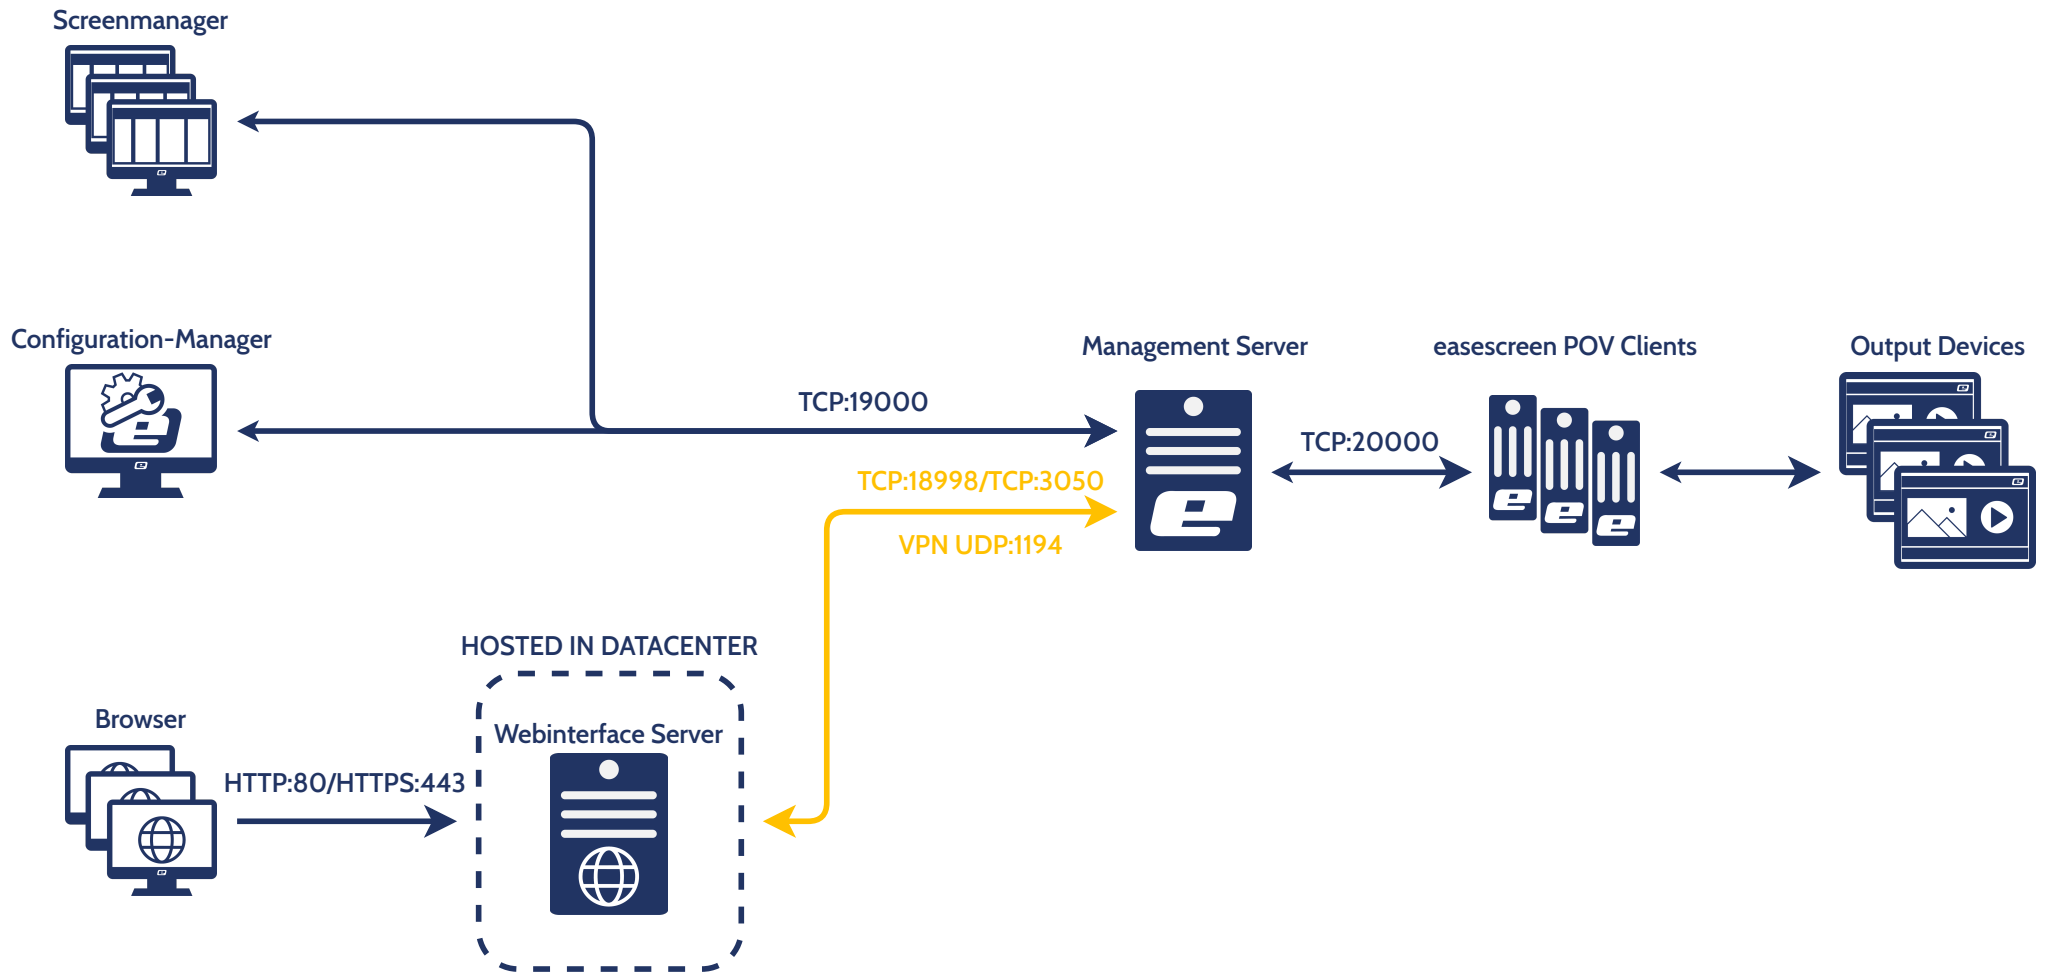



Webinterface hosted-Management Server-POV Clients

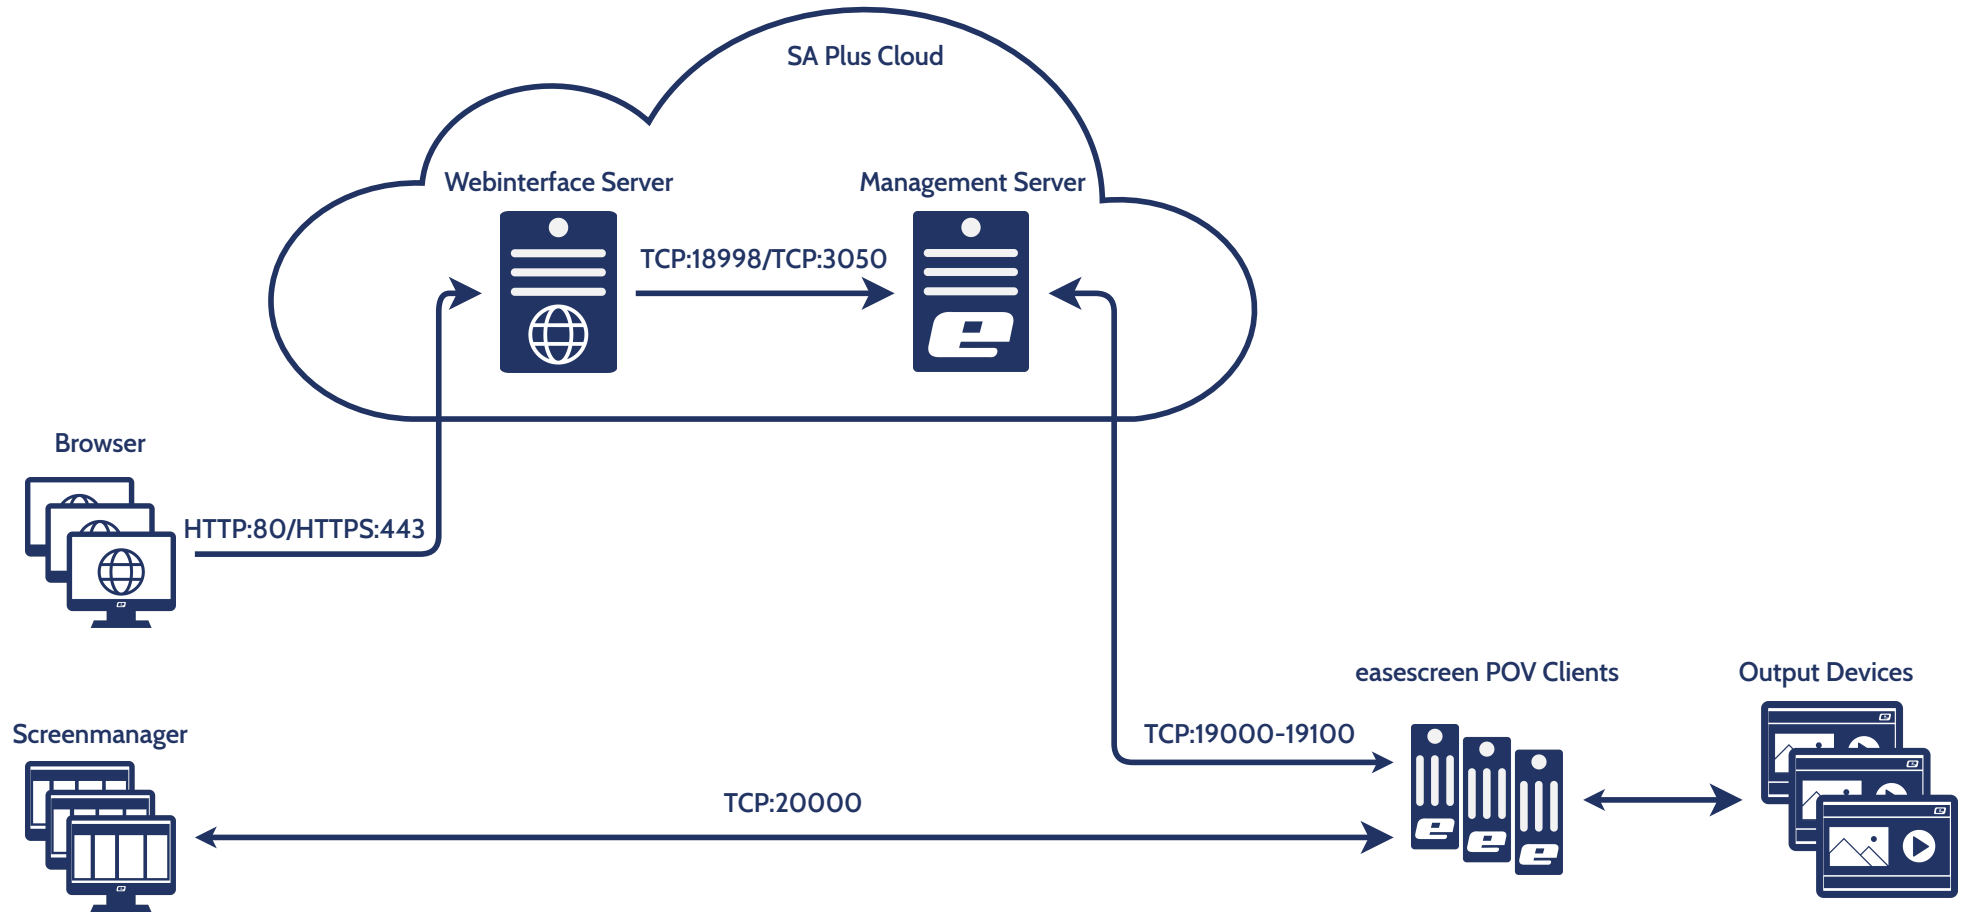


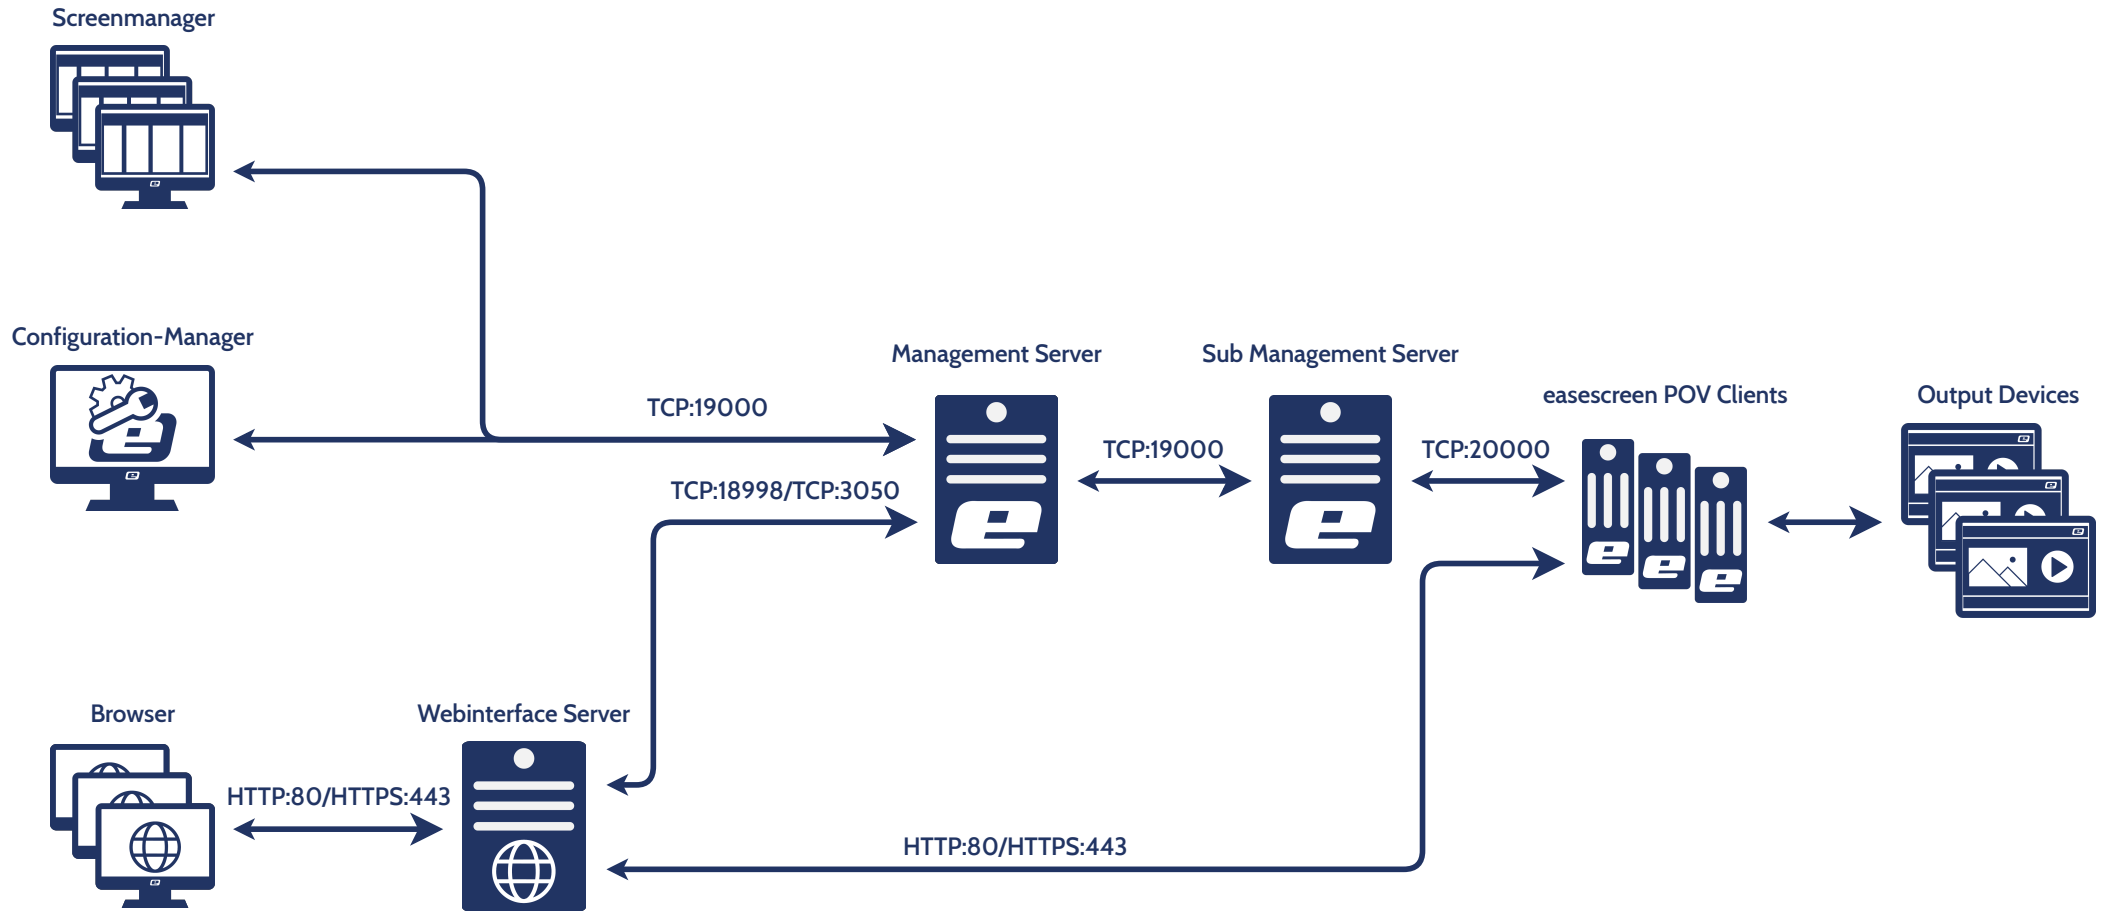

Webinterface on premises-Management Server-Scaled Sub Management Server-POV Clients

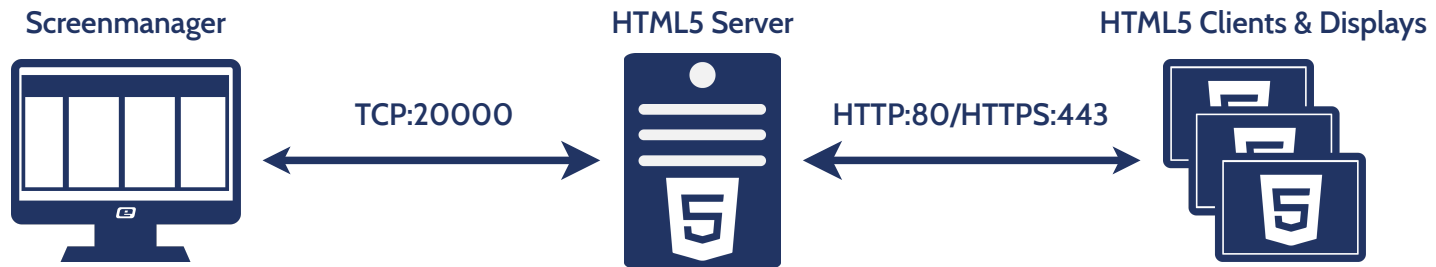

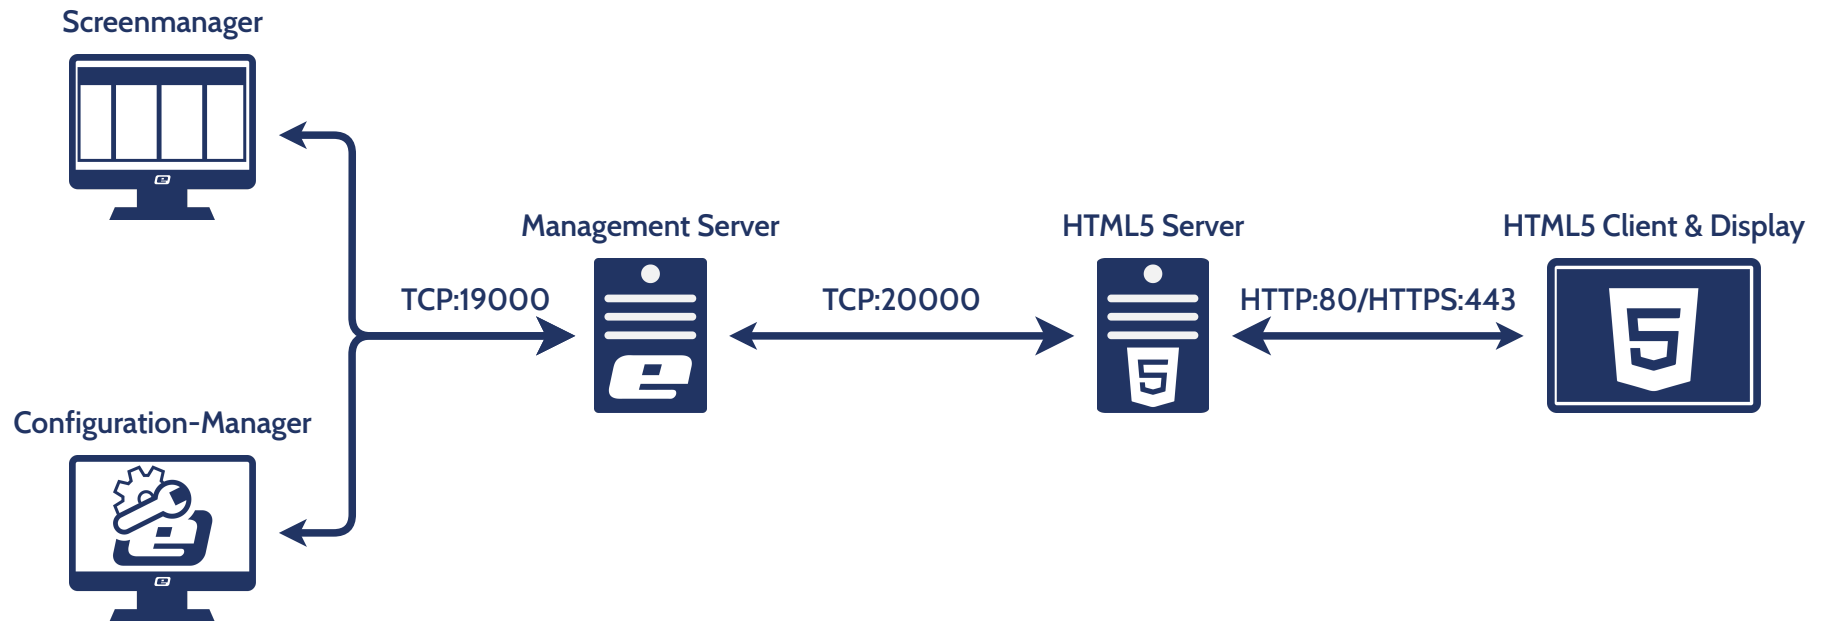

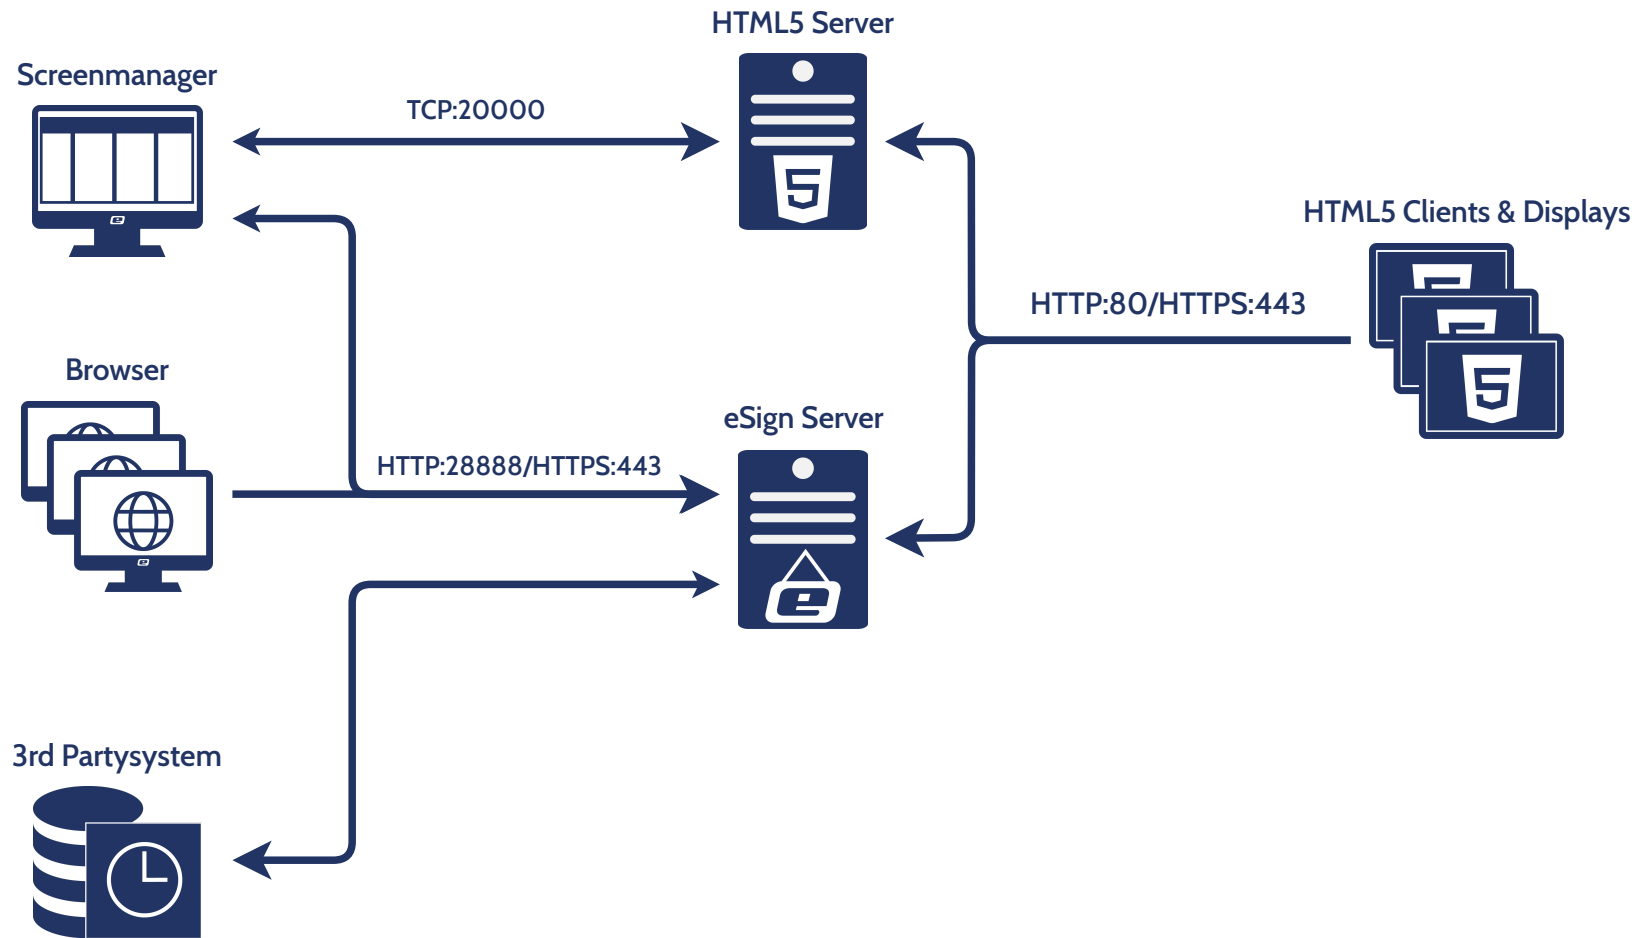

3rd Partysystem



eSign Server



eSign POV Client & Android



HTTP:28888/HTTPS:443


HTTP:28888/HTTPS:443


Browser









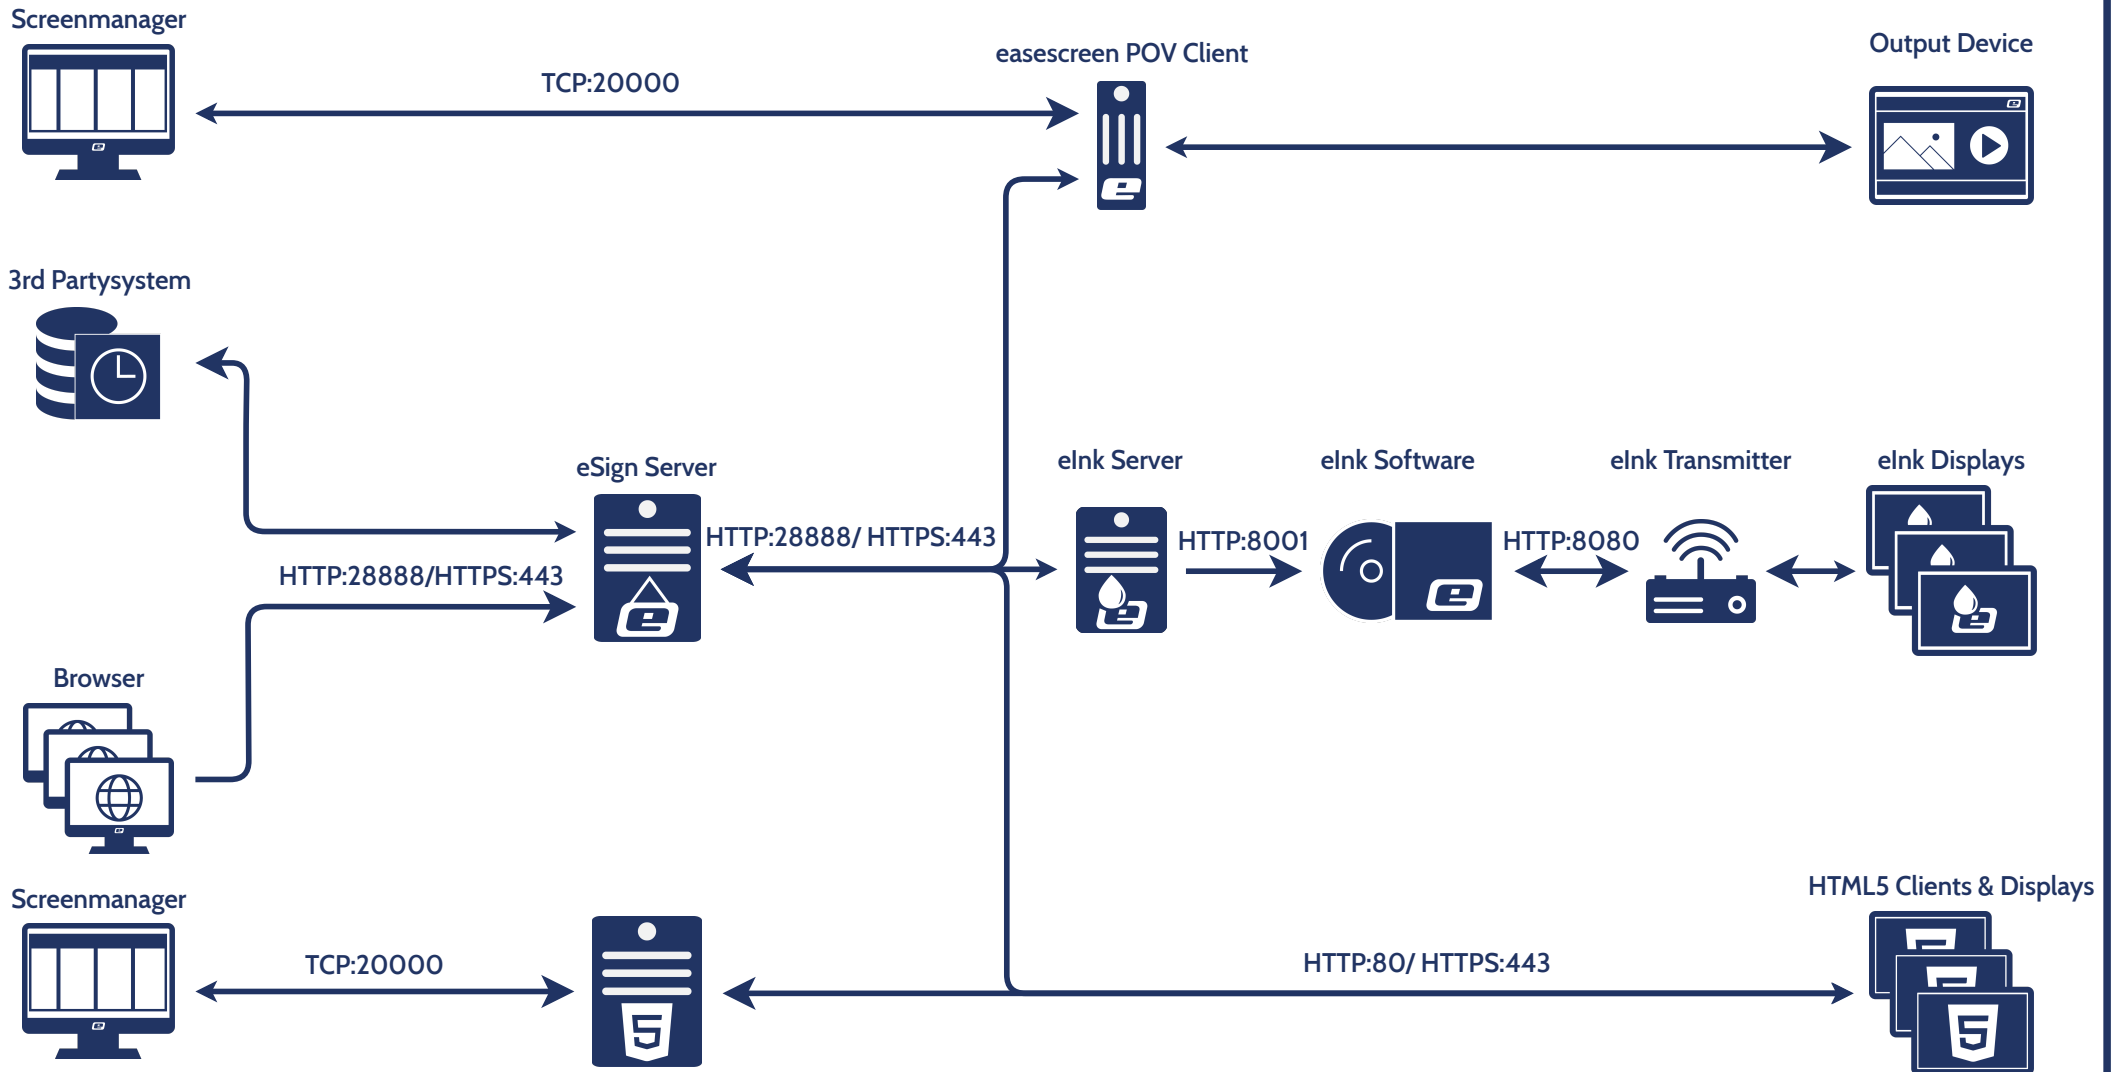


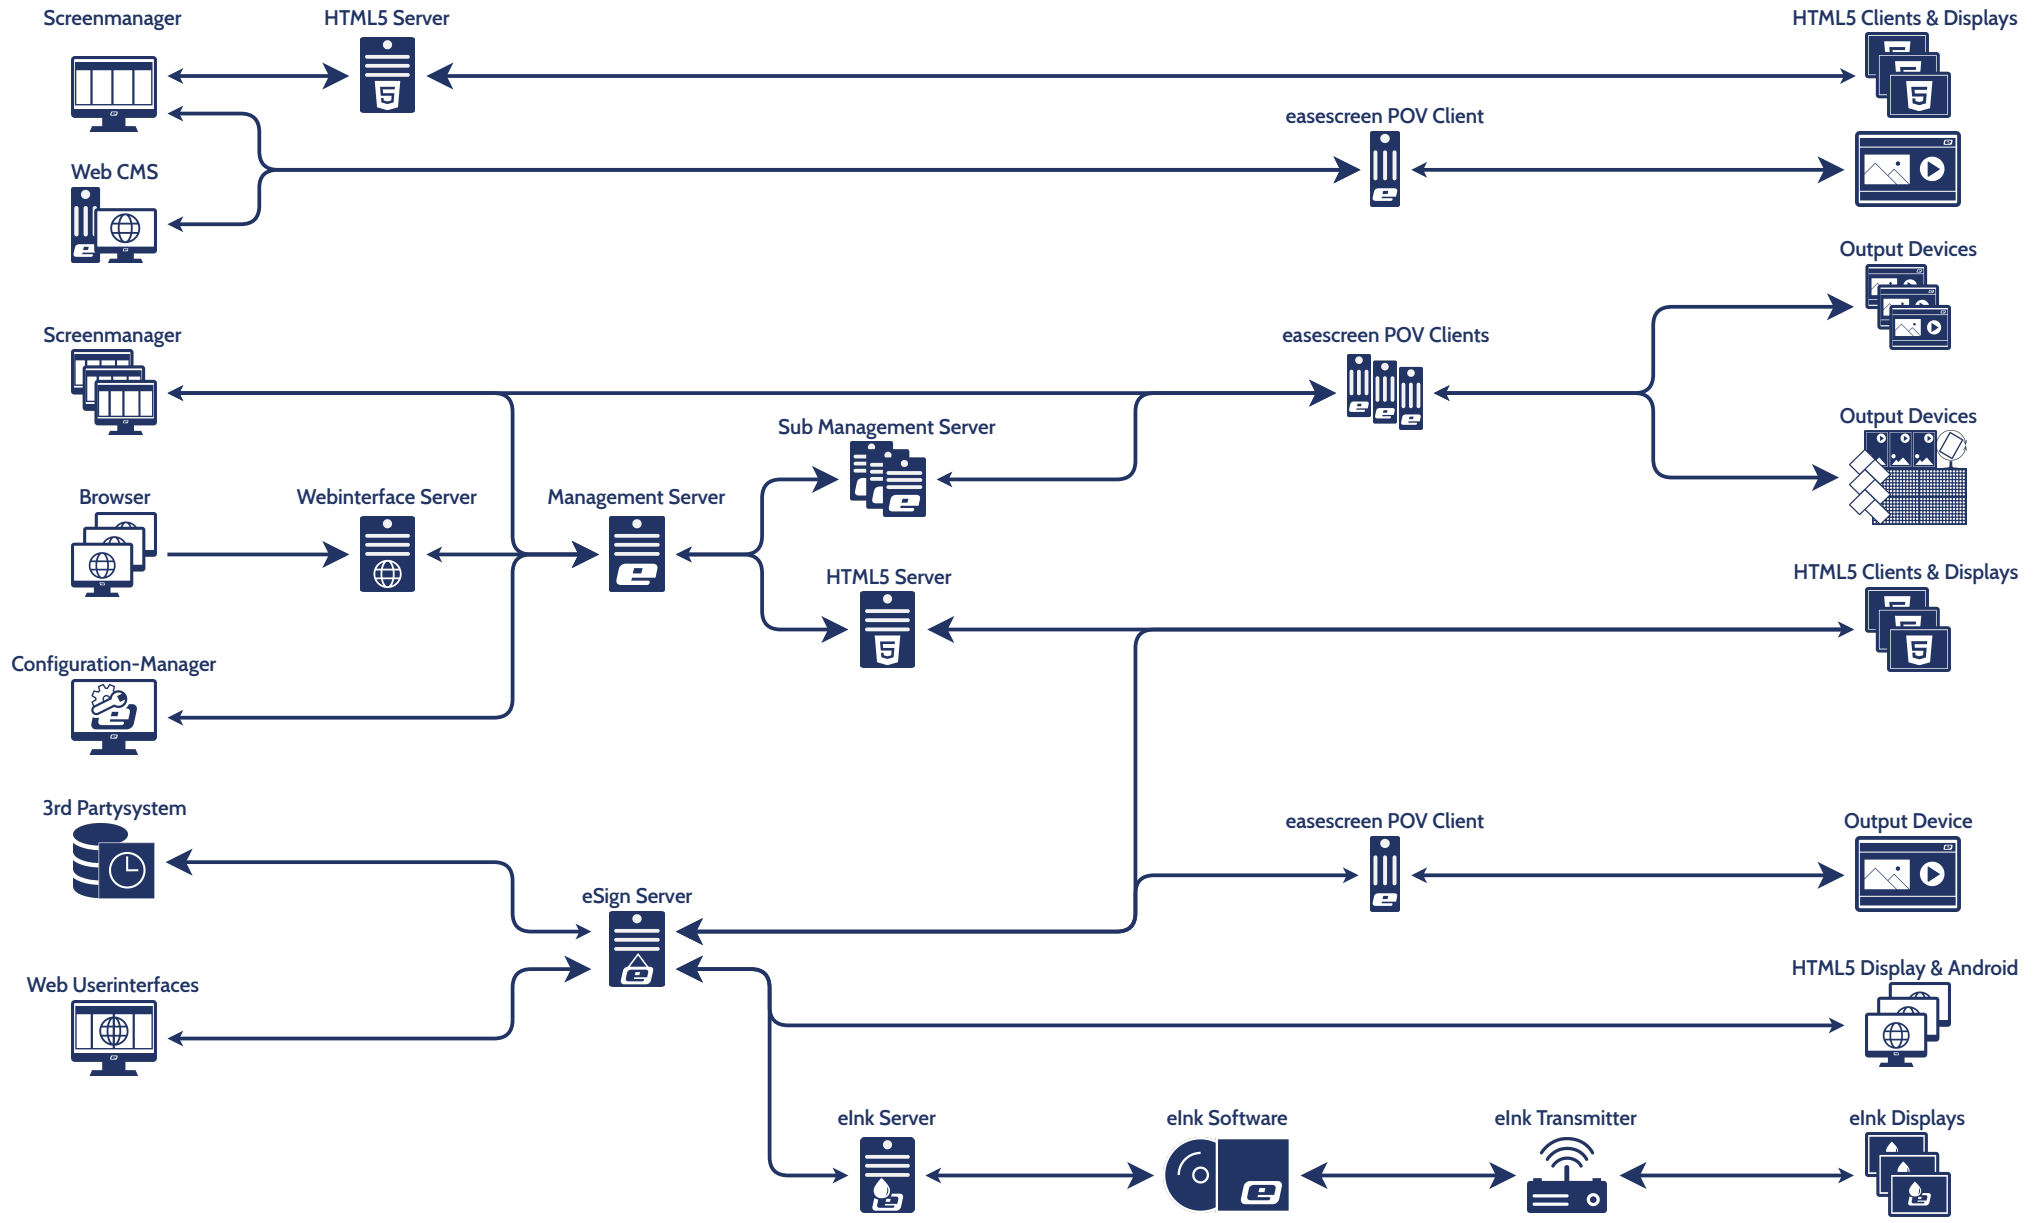


eas@screen System Overview

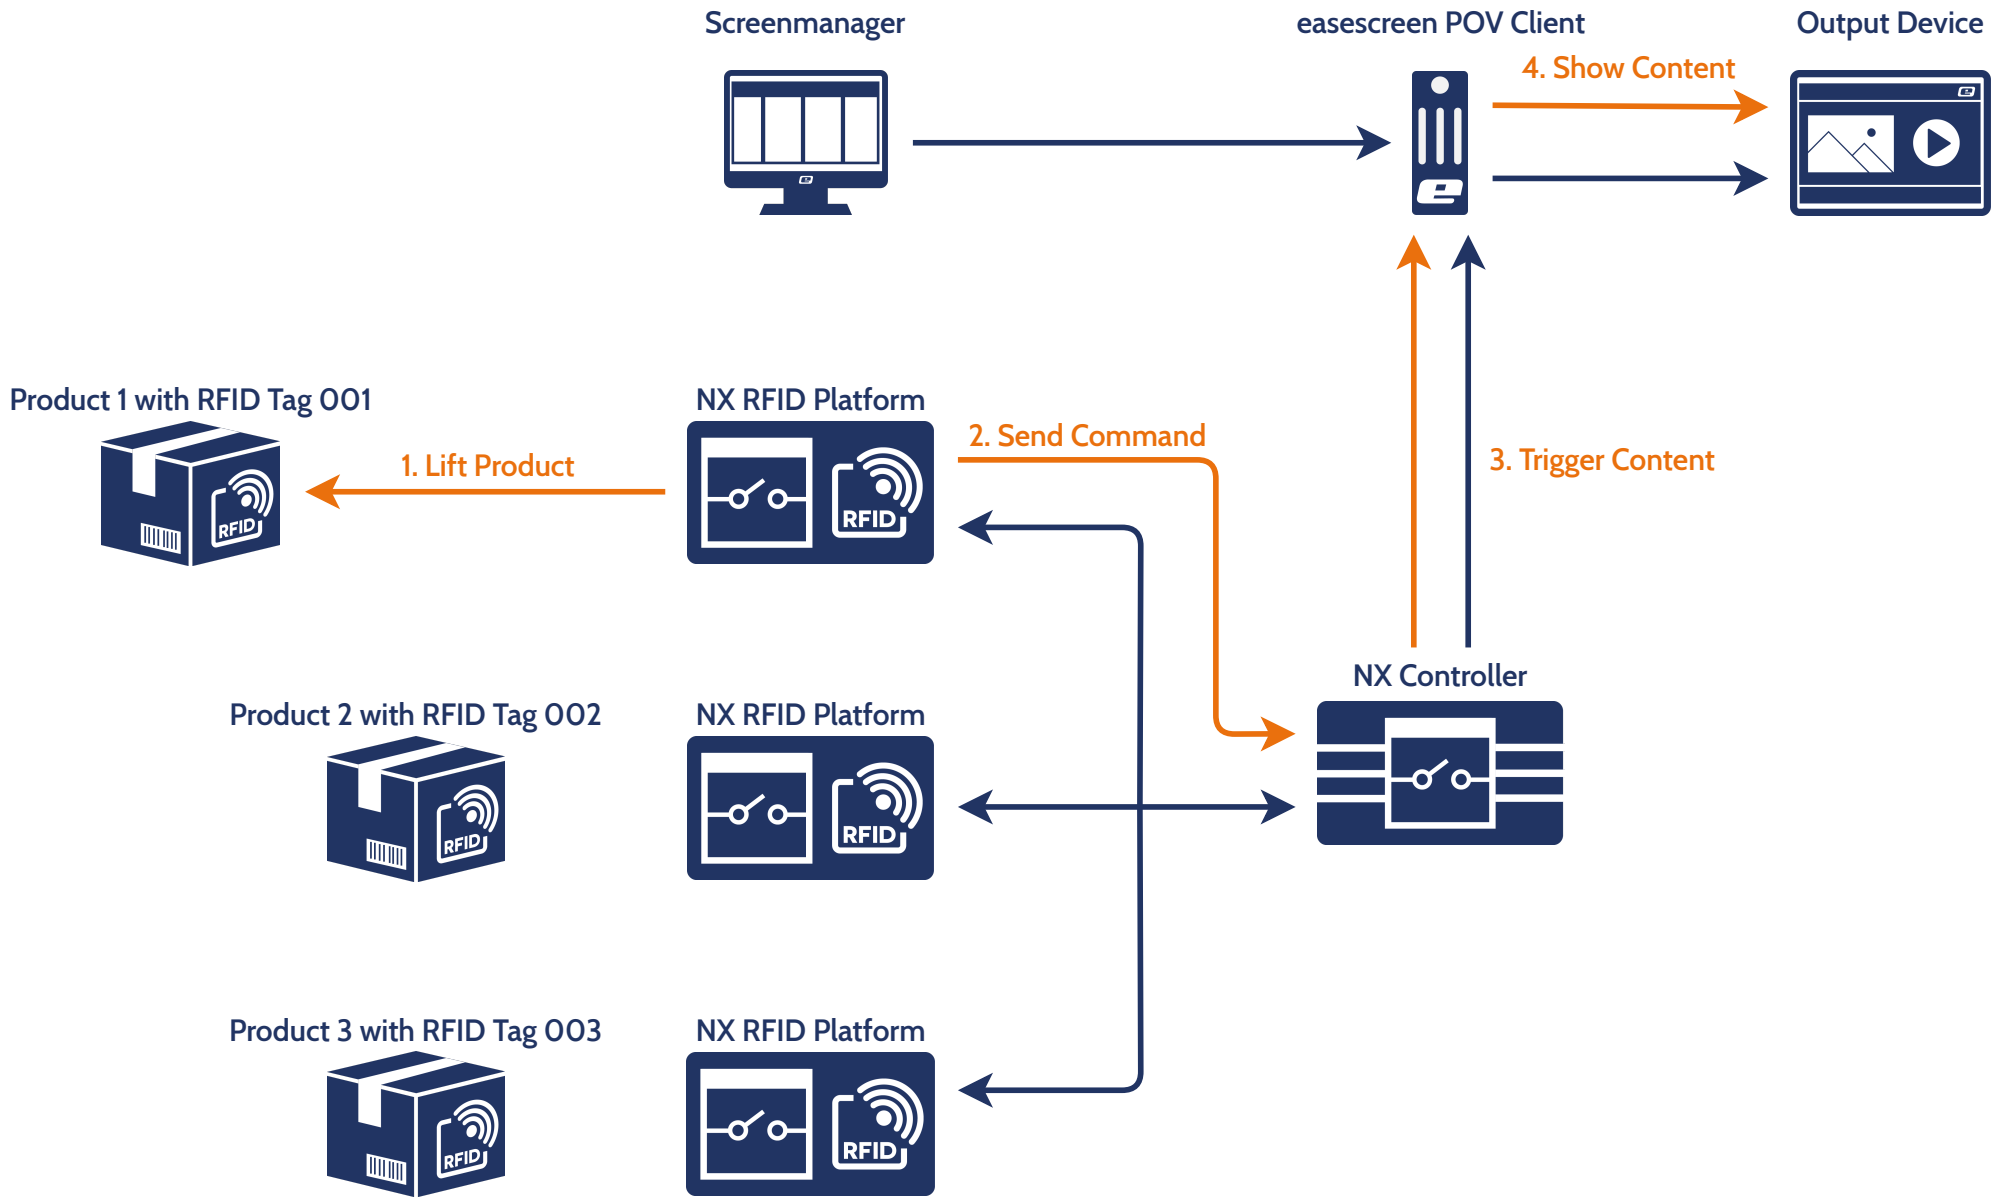

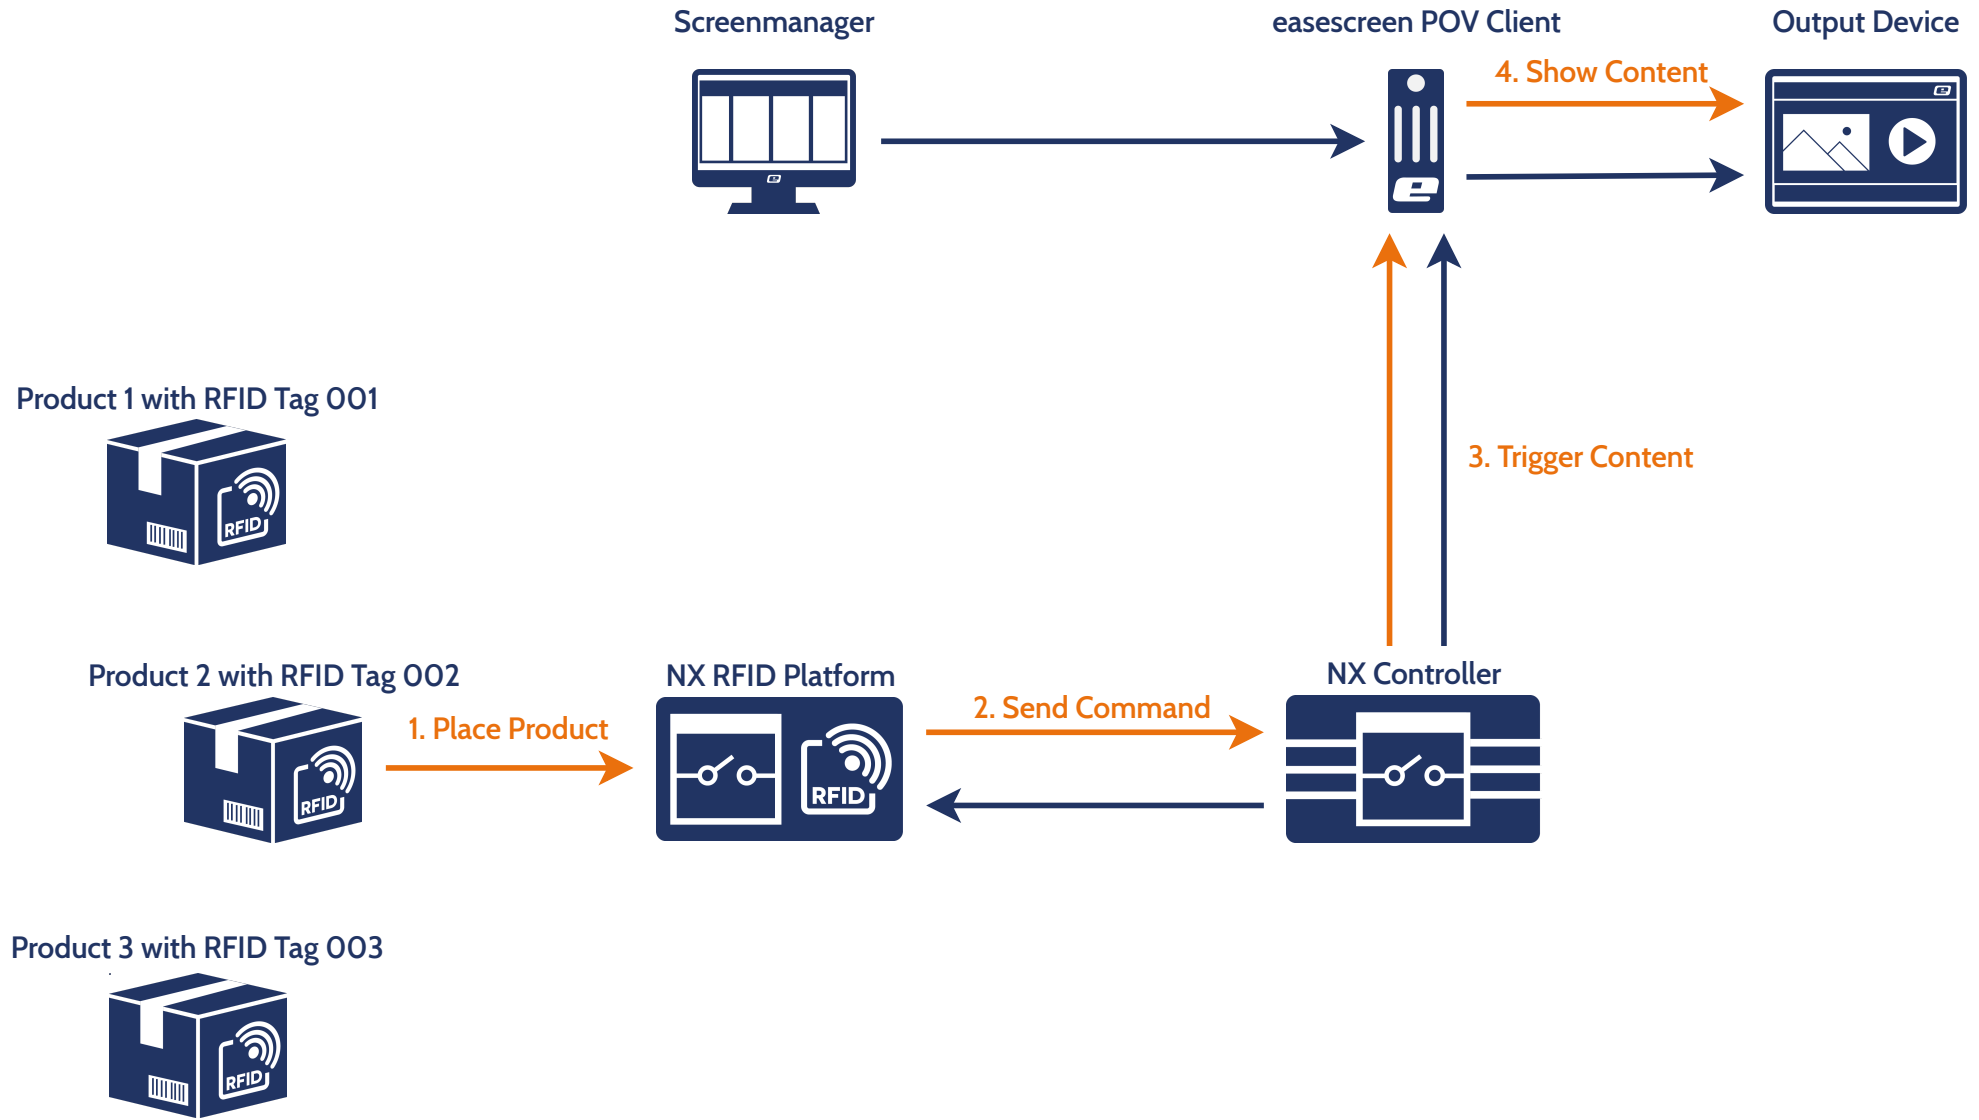

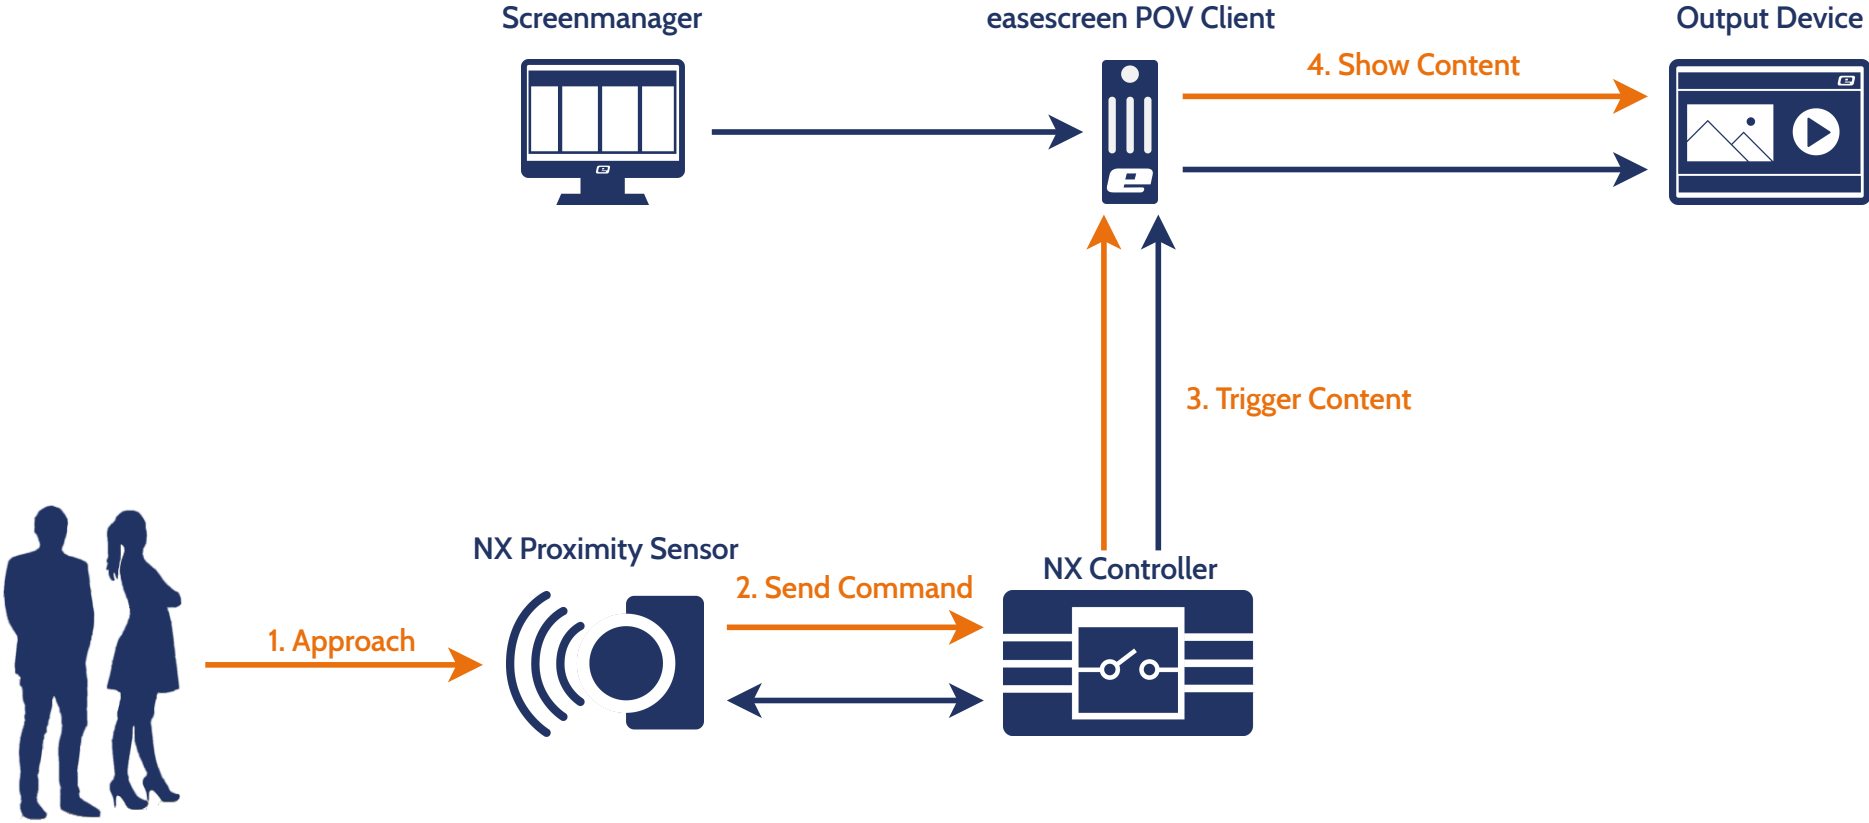

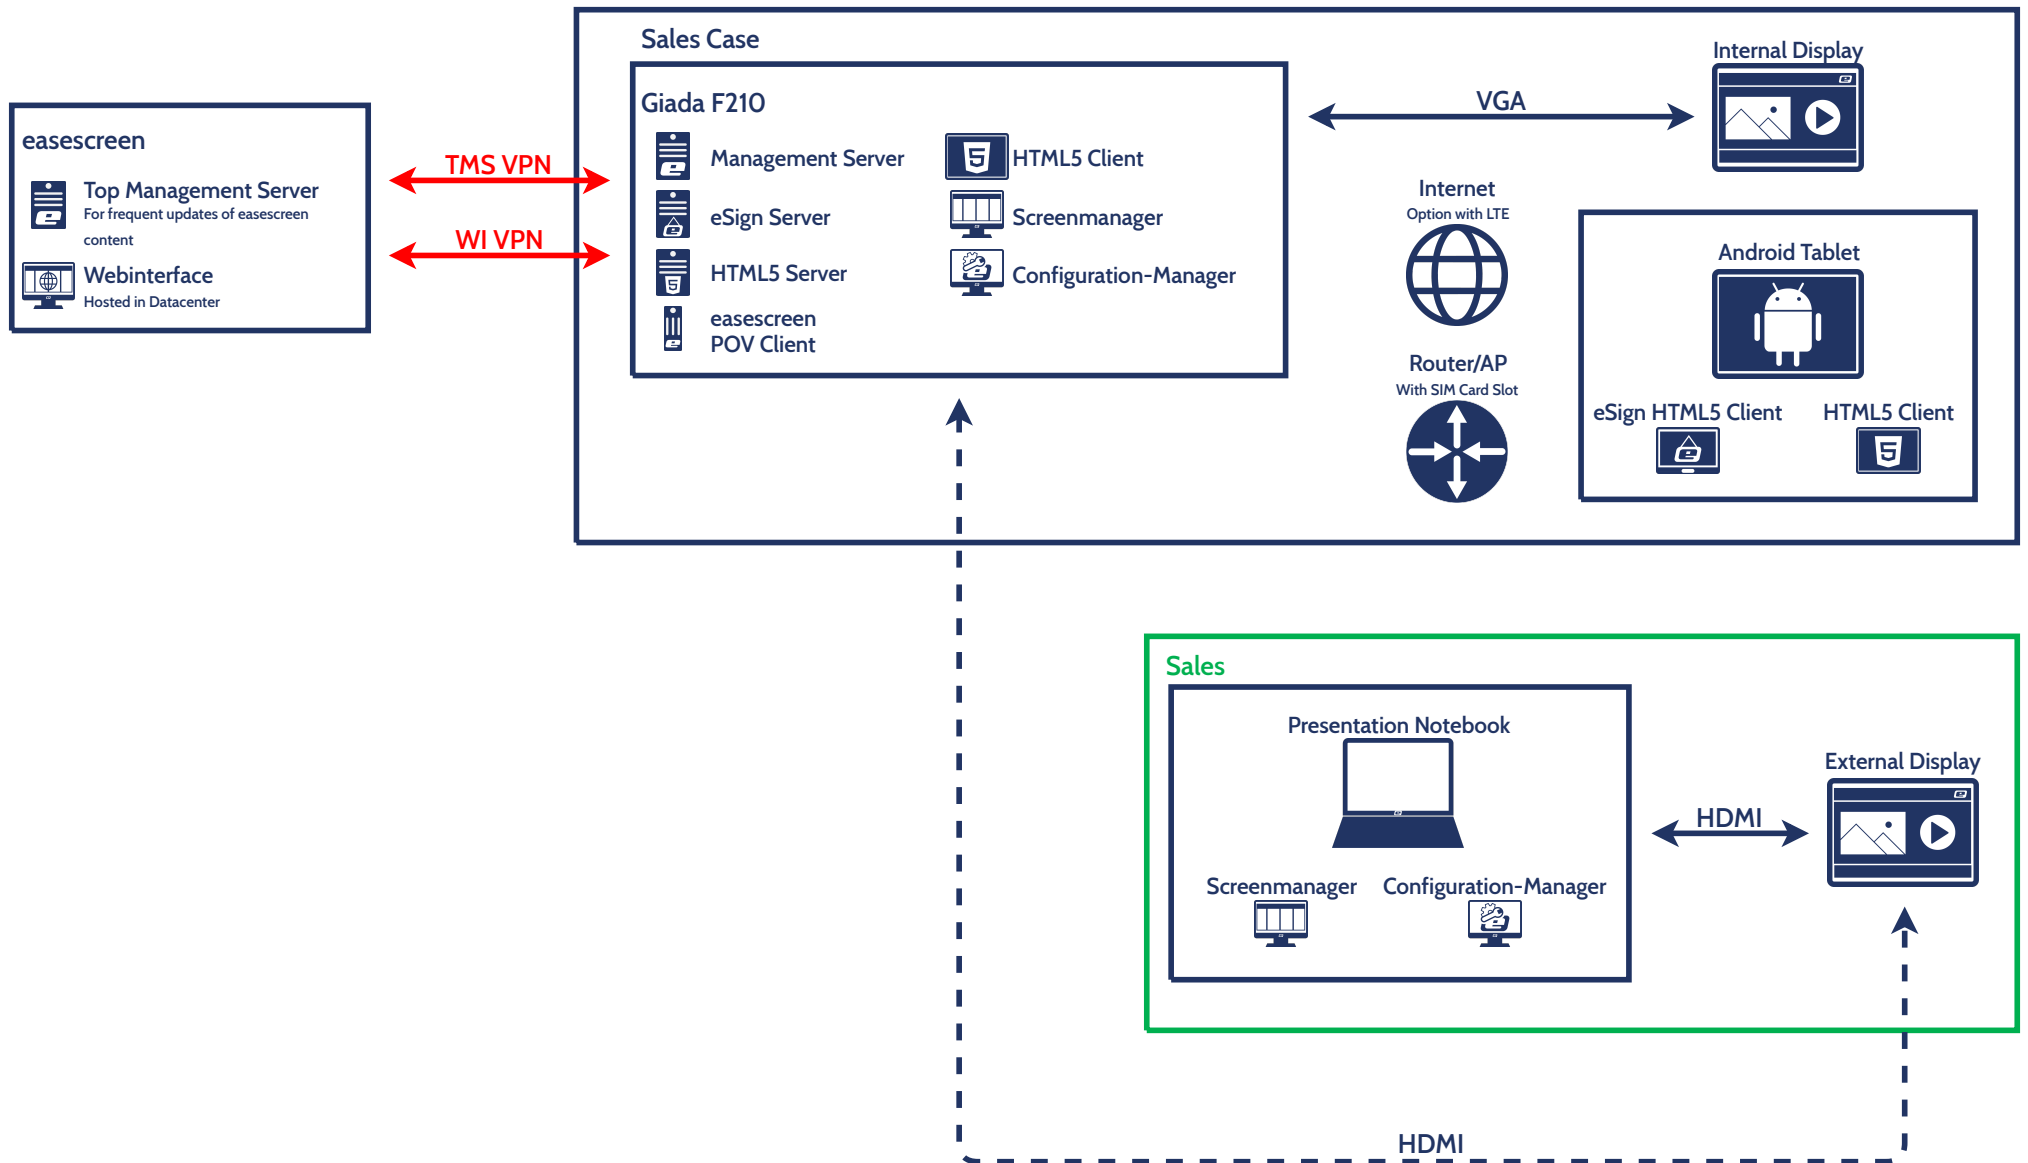

Screenmanager



Interactive Event

State Go: Default

State Stop: Triggered by Person Threshold

easescreen POV Client



eSCC Sensor Integration Library

Query sensor(s), Counting logic, Reset Count Data

Output Device



Shows Go/Stop

