



Qbic's TD-1060 Slim space management system is the perfect complement to any workplace, retail, or professional location requiring a top-tier solution with a minimal footprint.

TD-1060 *Slim*




TD-1060 Slim

Specification



I/O

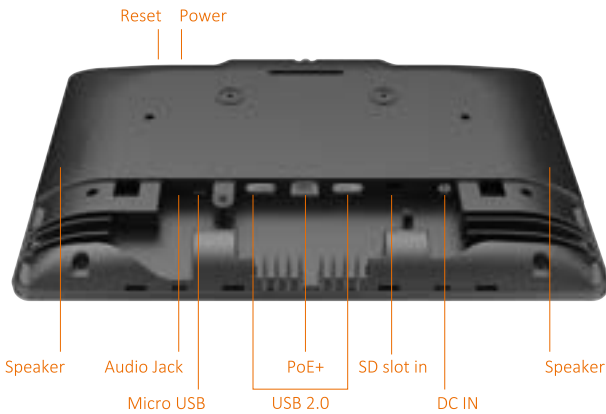

Optional Accessories



Bracket Kit



Adapter DC
12V 1.5A



AC-112
Adjustable Stand
30°/45°/60°

Feature	
Programming API	HTML5 / SMIL / Android API
Remote Configuration Center	Yes
PoE+	Yes
Beacon (BLE)	Option
Light bar	Front*1
System	
OS	Android 10/12
CPU	ARM Quad-core 1.5GHz (64 bit)
Memory	2GB DDR3L
Storage	16GB eMMC
Video decoder	H.264 / H.265,VC-1, MPEG-4, VP8
Image codecs	JPEG/BMP/GIF/PNG
Audio codecs	MPEG/OGG/ACC
Media	
Speaker	2W x 2
Display	
Size(inch)	10.1"
Display Resolution	1280 x 800(16:10)
Brightness	350 nits
Contrast ratio	1000:1
Touch	Yes
Viewing angle (H/V)	170° /170°
Orientation display	Landscape
I/O Interface (External)	
Ethernet	1 x RJ45 (10M/100M)
DC Input	Yes
USB 2.0	2 x USB2.0 type A
Audio out(Mic in)	1 x 3.5mm stereo
ADB	1 x Micro USB (ADB)
Storage Expansion	1 x Micro SDHC slot
Reset Button	Yes
Power Button	Yes
Connectivity	
WLAN	Opt.:WLAN 802.11b/g/n/ac 2.4 GHz,/5GHz
Power	
Input Voltage (V)	12V
Mechanical	
Dimension (WxDxH) (mm / inch)	248 x 20.8 x 166 mm(9.76"x0.82"x6.54")
Net. Weight (Kg/ Oz / Lb)	615g/21.75Oz/1.375lbs
Mounting type	Glass / Surface / Recessed
Material	Plastic
Environment	
Operating Temperature(°C /°F)	Operating Temp. 0 to 50°C /32 to122°F
Storage Temperature (package included) (°C/°F)	Storage Temp. -20°C to 70°C /-4 to 158°F
Ambient Relative Humidity	Humidity: 10 to 90% (non-condensing)
Environment	
Certification	CE/FCC/BSMI/NCC/RoHS
Warranty	
Warranty Period	1 yr
Accessory	
Adapter/Plug	Opt. :DC 12V, 1.5A
Screw	Option
Bracket	Option
Tape	Option
Sticker	Option
QSG	Yes



Website: www.qbictechnology.com
 Email: info@qbictechnology.com
 Contact: +886-2-2697-2000

©Copyright 2020 Qbic Technology. All Rights Reserved.