



DVI-7365-TX

HDMI 4K Fiber Optic Transmitter, 1x LC

DVI-7365-RX

HDMI 4K Fiber Optic Receiver, 1x LC

Designed for Extreme Requirements — The DVI-7365 is a high-performance, cost-effective, 4K Multiport Optical Extender designed to meet and exceed even the most demanding system requirements. It supports a wide array of signal types with or without HDCP content protection, provides long-distance extension over a single fiber cable, and supports ultra-high resolutions up to 4K (UHD) at 60Hz (4:4:4).

Multiple Signals Extended over a Single Cable — This multiport optical extender supports uncompressed HDMI 4K /60p, embedded audio, bi-directional IR, RS 232 and two 10/100 BaseT Ethernet ports, using only a single fiber optic cable. It can extend these signals over cable distances of up to 1.86 mi. (3,000 meters). For added versatility, these units provide Advanced EDID Management with four operating modes: Pass-through, Learn 1, Learn 2, and Factory Default.

Advanced Fiber Optic Technology — Each extender set consists of an optical transmitter unit and an optical receiver unit. The transmitter converts the AV signals into light pulses for transmission over a single strand of Multi-Mode or Single-Mode fiber optic cable. The receiver converts the light pulses back to AV signals for the display, as well as other downstream devices. By using advanced fiber optic technology, without any compression, this product provides superior picture quality over greater distances than other extension methods, such as copper cables or CAT-X extenders. Together, these features make the DVI-7365 the ideal, cost-effective solution for system designers and integrators who need to extend high resolution HDMI signals over extreme distances with flawless image quality.


FEATURES

- Supports resolutions up to 4096x2160 /60p (4:4:4), without using compression
- Extends HDMI, Ethernet (10/100Base-T), RS-232, and bidirectional IR over a single strand of fiber optic cable
- HDCP 1.4 and HDCP 2.2 compliant
- **Maximum extension distances:**
Single-Mode Fiber: > 1.86 miles (~ 3,000 m)
OM3 Multi-Mode Fiber: > 1,000 ft. (~ 300 m)
- Four Advanced EDID Management Modes: Pass-through, Learn 1, Learn 2, and Factory Default
- Optical fiber transmission is immune to environmental signal noise
- Low RFI / EMI profile for sensitive applications
- Locking DC power connectors for added security and reliability
- Heavy-duty mounting brackets are included


DVIgear, Inc. is the owner of numerous trademarks, both registered and unregistered, including without limitation, the following marks: DVIgear®, DISPLAYNET®, DISPLAYNET SERVER®, DISPLAYNET MANAGER®, N/AV Design®, HYPERLIGHT® and WILDCAT®.

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. All other third-party trademarks used herein are the properties of their respective owners.


STAND-ALONE DIAGRAM

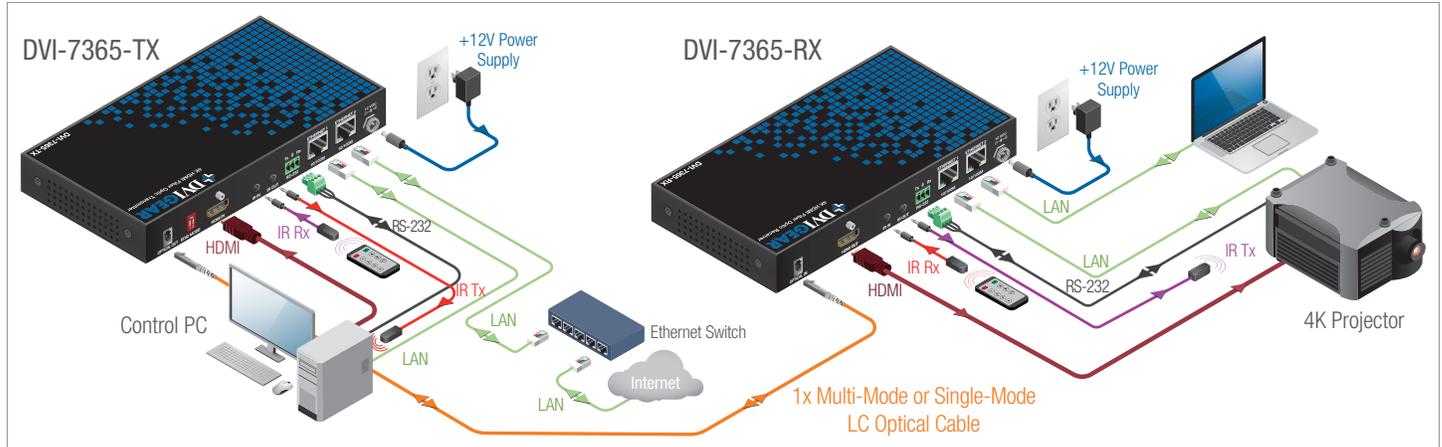

DVI-7365-TX INTERNAL BLOCK DIAGRAM

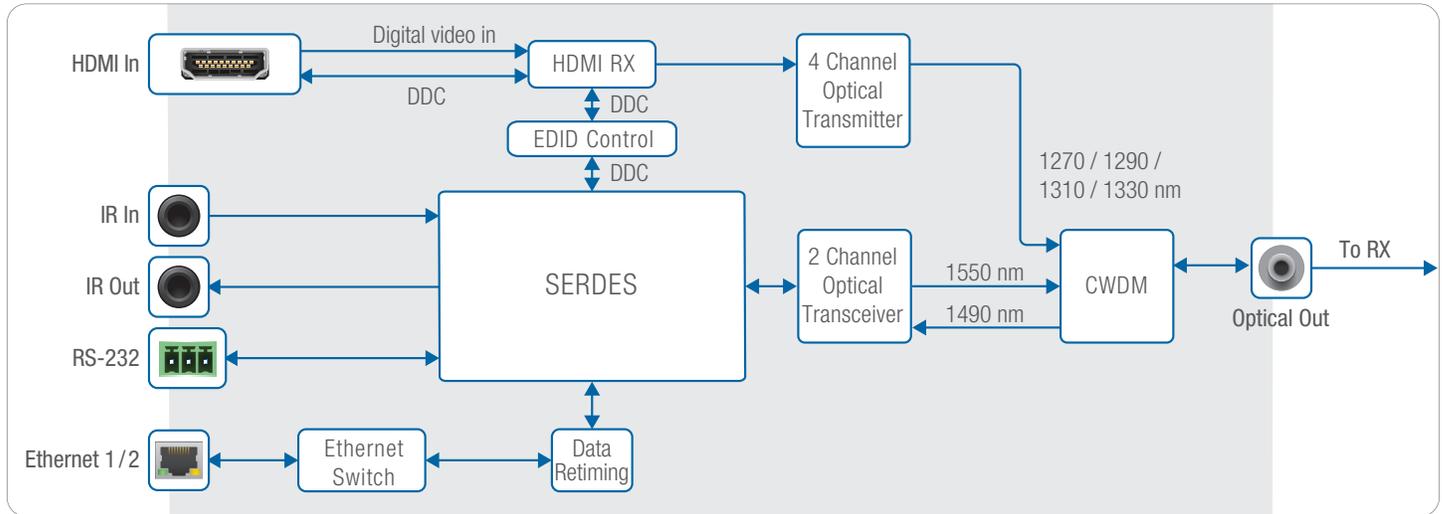

DVI-7365-RX INTERNAL BLOCK DIAGRAM

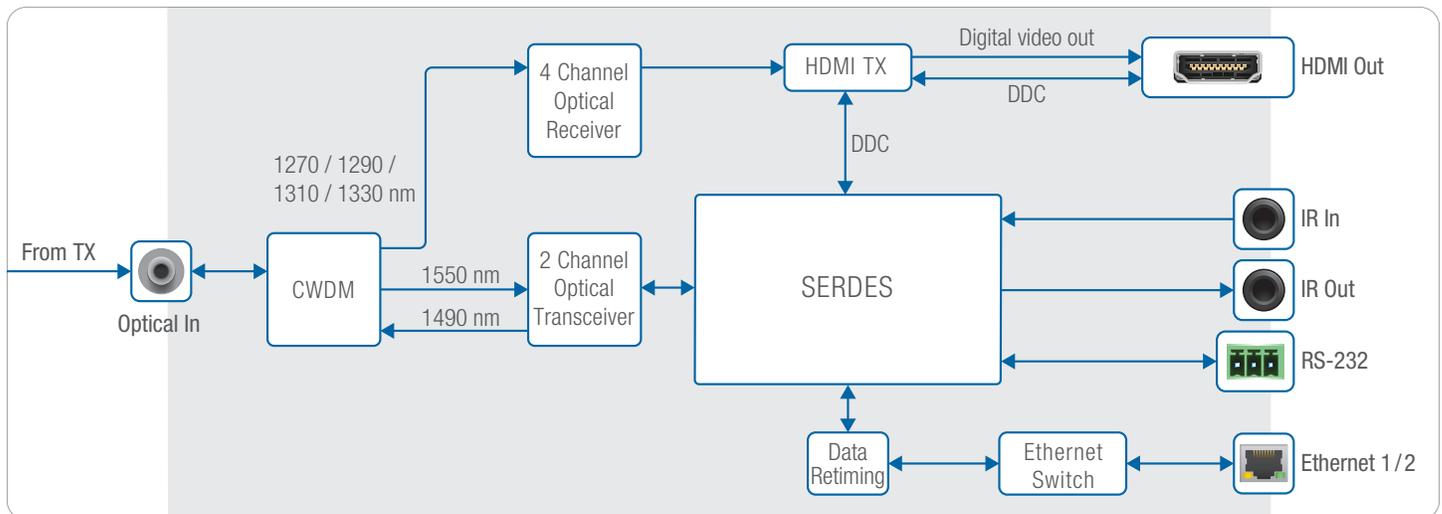

DVI-7365-TX
Front View



DVI-7365-TX
Rear View



DVI-7365-RX
Front View



DVI-7365-RX
Rear View



SPECIFICATIONS

Performance	
Standards Compliance	HDMI 4K /60p, DVI v1.0, HDCP v2.2
Maximum Pixel Clock Frequency	600 MHz
Maximum Video Bit Rate	6Gbps / 18Gbps aggregate
Total System Jitter (I/O)	0.6 UI maximum
Inter-Channel Skew	2 nanoseconds maximum
Ethernet	10/100 BaseT
Supported Color Depth	Up to 12-bit per pixel
Supported Resolutions	Up to 4K: 4096 x 2160 /60Hz (4:4:4)
Digital Audio Support	Embedded HDMI digital audio up to 8-channel (7.1) LPCM, 48 kHz, 24-bit audio capability
Connections	
HDMI Input / HDMI Output	1 ea. 19-pin Female HDMI connector
Optical	1 ea. LC fiber optic connector
Ethernet	2 ea. RJ-45 female connector
RS-232	1 ea. 3-pin Phoenix connector
IR Input / IR Output	IR IN: 1 ea. 3.5mm stereo mini-jack; IR OUT: 1 ea. 3.5mm mini-jack
Power	1 ea. Screw-Locking 2.1 / 5.5 mm female connector
Control	
TX Unit	Front Panel: EDID Learn button, LEDs for EDID, Power, Optical Link, HPD and Ethernet Back Panel: EDID Mode selection via 2x DIP switches
RX Unit	LEDs for Power, Optical Link, HPD and Ethernet
Optical	
Optical Technology	CWDM (Coarse Wavelength Division Multiplexing) using 6 optical wavelengths
Laser Diodes	1270 / 1290 / 1310 / 1330nm 10Gbps CWDM DFB Lasers; 1490nm/1550nm 2.5Gbps CWDM DFB Lasers
Photo Diodes	1100 – 1620nm PIN Photo Detectors
WDM Filter	Integrated 1270nm / 1290nm / 1310nm / 1330nm / 1490nm / 1550nm filter
Optical Wavelengths / Actual Data Rates	TMDS Signals: 1270nm / 1290nm / 1310nm / 1330nm = 6.0Gbps DDC, IR, RS-232, Ethernet Signals: 1490nm / 1550nm = 1.25Gbps
Optical Link Power Budget	8.0 dB (minimum)

SPECIFICATIONS (CONTINUED)

Cable		
Maximum Cable Length (typical)	9/125 μ Single-Mode Fiber: > 1.86 miles (~ 3,000 meters) 50/125 μ OM3 Multi-Mode Fiber: > 1,000 ft. (~ 300 meters)	
DVIGear Fiber Cable	OFNP, Plenum rated – additional data and custom lengths available on request	
Cable Jacket	OFNP, Plenum-rated, Black PVC Jacket	
Cable Outside Diameter	0.2" (4.4 mm)	
DDC Support		
EDID Management / Modes	EDID Pass-through (transparent) EDID Learn 1 / Learn 2 (cached) Factory Default EDID (1080p 2-Ch audio)	
HDCP Support	Supports HDMI signals with or without HDCP encryption	
Mechanical		
Case Dimensions (H x W x D)	Without Brackets: 1.0" x 7.5" x 3.9" (26.0 x 190.0 x 99.5 mm) Width with Brackets: 8.5" (215.5 mm)	
Weight	TX Unit: 568g / RX Unit: 563g	
Construction	High-impact metal enclosure with jet black finish	
Mounting Options	Mounting Brackets are included	
Environmental		
Operating / Storage Temperature	14° to +158° F (-10° to +70°C) / -40° to +185° F (-40° to +85°C)	
Operating / Storage Humidity	5% to 80% (non-condensing) / 5% to 95% (non-condensing)	
Power Requirements		
Optical Transmitter / Receiver	Both TX and RX units must be powered by the supplied external power adapters.	
External AC Power Adapters	Model No: DVI-7216-PS Input: 100-240VAC / 50-60Hz 0.8A; Output: 12VDC, 2.0A	
Maximum Power Consumption	DVI-7365-TX: 530 mA (6.4 watts); DVI-7365-RX: 450 mA (5.4 watts)	
Regulatory Approvals		
Fiber Optic Extender Unit	FCC Class B, CE, RoHS	
Laser	US-FDA CDRH Class 1	
External AC Power Adapters	FCC, CE, UL, C-UL, BSMI, CB, CCC, LVD, LPS, PSE, RCM, RoHS, WEEE	
Warranty		
Limited Warranty	3 Years Parts and Labor	
Model Numbers⁽¹⁾		
DVI-7365-TX	4K HDMI Fiber Optic Transmitter, 1x LC	
DVI-7365-RX	4K HDMI Fiber Optic Receiver 1x LC	
DVI-CUST-OPT	Custom Fiber Optic Cable, Plenum rated Specify: Length, Fiber Type (MMF, SMF) and Optical Connector (LC)	
Accessories Included⁽¹⁾		
1x External AC Power Adapter (DVI-7216-PS) with USA plug 1x User Guide 1x 3-Pin Phoenix Connector (Phoenix p.n. 1840379) 1x IR Transmitter (DVI-7360-IR-TX) (ships with DVI-7365-TX) 1x IR Receiver (DVI-7361-IR-RX) (ships with DVI-7365-RX) 2x Mounting Brackets with Screws	Optional Accessories	
	External AC Power Adapter (p.n. DVI-7216-PS) with Euro, UK, or Australia plugs +12 VDC Power Distribution Unit (p.n. DVI-7520-PDU) Custom Optical Cables (contact DVIGear for details)	

Note 1: The Transmitter and Receiver units are sold separately. The accessories shown here are included per unit.